



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 313

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Kushal Kumar s/o Sh. Lajja Ram of Ambwala,
P.O.Sainwala, Tehsil Nahan, Distt. Sirmaur, HP

Subject: **Raising of plantation Fencing work- Award of Work thereof. (Job No/. P-4/ RF Chandni C-6/15Ha/2021-22 (10+5)-GP Katwar.**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 4,09,000/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is **25 days** from award of work.

Bid security amounting to **Rs.21,500/-** equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.

District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 315

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh. Dev Raj s/o Sh. Kehar Singh,
village Agron, P.O.Nagheta,
Tehsil Paonta Sahib, Distt. Sirmaur, HP

Subject: **Raising of plantation Fencing work- Award of Work thereof. (Job No/. P-5/ RF Malgi C-25/15Ha/2021-22 (10+5)-GP Muglanwala Kartarpur)**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 4,23,400/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.21,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further, requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department

INTEGRATED DEVELOPMENT PROJECT (IDP) For



Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 317

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Naresh Kumar s/o Dhani Ram
VPO Kanti Mashwa,
Tehsil Kamrau, Distt.Sirmaur, HP

Subject: **Raising of plantation Fencing work- Award of Work thereof. (Job No/. P-6/ RF Malgi C-14- &15/15Ha/2021-22 (10+5)-GP Muglanwala Kartarpur**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 4,26,200/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.21,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta


You are, further, requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U.Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.


District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department

INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com



NO.DPO/NHN/Acctt./ 319

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh. Virender Singh Pundir s/o Sh.Chet Ram.
Village Gatlog, P.P. Bhajond,
Tehsil Nohradhar, Distt. Sirmaur, HP.

Subject: **Raising of plantation Fencing work- Award of Work thereof. (Job No. P-1/ RF Chhichheti C-6/15Ha/2021-22 (10+5)-GP chhichheti**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 2,80,400/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.21,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit *Nahan*.

You are, further requested to please contact the APO/FEO of *Nahan* Unit and start the work at once as per guidance.

Encls: As above.

[Signature]
District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO *Nahan* for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Staple, Fence Post etc. should be mentioned/enclosed with the bill of work.

[Signature]
District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 321

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Sunil Kumar s/o Sh. Shokeen Chand,
Village Mandpa, P.O. B/Bag,
Tehsil Nahan, Distt. Sirmaur, HP

Subject: **Raising of plantation Fencing work- Award of Work thereof. (Job No/. P-2/ RF Sara C-4 (Tooni Pani)/15Ha/2021-22 (10+5)-GP Chhichheti. Dear Sir,**

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 3,09,500/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.21,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit ~~Nahan~~.

You are, further requested to please contact the APO/FEO of ~~Nahan~~ Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN//

Dated, Nahan the/

Copy is forwarded to APO ~~Nahan~~ for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 323

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Arun Kumar, Dy.Ranger(Retd.) s/o Karam Chand,
70/7 Upper Street Nahan,
Distt. Sirmaur, HP 173001

Subject: Raising of plantation Fencing work- Award of Work thereof. (Job No/ P-3/ RF Chhachheti
C-5/15Ha/2021-22 (10+5)-GP Bhanet Haldwani.

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 2,72,600/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.21,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

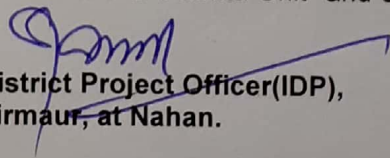
The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta


You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.


District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department

INTEGRATED DEVELOPMENT PROJECT

(IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 325

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh. Virender Singh Pundir s/o Sh.Chet Ram.
Village Gatlog, P.O. Bhajond,
Tehsil Nohradhar, Distt. Sirmaur, HP

Subject: **Maintenance of plantation-Award of Work thereof. (Job No./ P-1/ RF Chhichheti C-6/17Ha./2020-21-GP Chhichheti.**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 1,07,700/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.7,800/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.

District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT

(IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 327

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Shri Dhanbir Singh s/o Sh. Roop Singh,
Village Bhajoun, PO Korga, Tehsil Kamrau,
District Sirmaur, HP

Subject: **Maintenance of plantation-Award of Work thereof. (Job No/. P-2/ RF Chandni C-4(Kathar)/14Ha./2020-21-GP Chandni**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 1,37,700/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.6,900/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta


You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.


District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 329

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Sunil Kumar s/o Basti Ram,
vill. Sonthal, P.O& Tehsil .Shillai,
Distt.Sirmaur, HP

Subject: Maintenance of plantation-Award of Work thereof. (Job No/. P-3/ RF Rajban C-5&C-6/16Ha./2020-21-GP Muglanwala Kartarpur)

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to Rs. 75,000/- only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.4,200/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the 5 days* of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT

(IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 331

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: ✓ Sh. Dev Raj s/o Sh. Kehar Singh,
village Agron, P.O.Nagheta,
Tehsil Paonta Sahib, Distt. Sirmaur, HP

Subject: **Maintenance of plantation-Award of Work thereof. (Job No/. P-4/ RF Malgi C-23/13Ha./2020-21-GP Muglanwala Kartarpur.**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 1,28,300/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.6,400/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract.

Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta


You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.


District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department

INTEGRATED DEVELOPMENT PROJECT

(IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com



NO.DPO/NHN/Acctt../ 333

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Sh.Mohan Lal s/o Sh.Tulsi Ram,
Vill. Tirmali, P.O. & Tehsil Dadahu, Distt. Sirmaur, HP

Subject: **Maintenance of plantation-Award of Work thereof. (Job No/. P-5/-RF Sara C-4(Sarta)/7Ha./2020-21-GP Chhichheti.**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 61,800/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.3,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract.

Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.


The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.


District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT (IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 335

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: Balbir Singh s/o Rattan Singh,
village Kiyari, P.O. Kiyari Gundah,
Tehsil Shillai, Distt. Sirmaur, HP

Subject: **Maintenance of plantation-Award of Work thereof. (Job No. P-6/ - RF Sara(Dhatiyat) /13Ha./2020-21-GP Malgi.**

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 92,600/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.6,500/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed.

Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.

District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.



H.P. Forest Department



INTEGRATED DEVELOPMENT PROJECT

(IDP) For

Source Sustainability And Climate Resilient Rain-fed Agriculture

(Implemented by H.P. Natural Resource Management Society)

District Project Officer, (IDP), Sirmaur at Nahan, Tel & Fax: - 01702-222423.

Email Id: dponhn@gmail.com

NO.DPO/NHN/Acctt../ 337

Dated, Nahan the 26-07-2021

From: District Project Officer(IDP),
Sirmaur, at Nahan.

To: ✓ Sh. Vijay Singh s/o Sh. Jalam Singh,
vill. Danda, P.O. Rajpur,
Tehsil Paonta Sahib, Distt. Sirmaur, HP

Subject: Maintenance of plantation-Award of Work thereof. (Job No/. P-7/ -RF Danda
C-17/16Ha./2020-21-GP Gorkhuwala.

Dear Sir,

Please refer the rates quoted by you on 17.07.2021 as per RFQs opened in the office of DPO Sirmaur at Nahan on 17.07.2021 at 2.40 P.M. has been accepted/approved by the undersigned being the lowest amounting to **Rs. 1,46,100/-** only.

The scope of work is to be executed as per schedule of quantity attached herewith.

Time stipulated for completion of work is 25 days from award of work.

Bid security amounting to Rs.7,300/- equivalent to 5% of the contract price deposited by you, has been converted into performance security, which will be released after successful completion of contract. Please attend this office on any working day for signing the agreement deed. Income tax, GST and other taxes/dues as applicable will be recovered from your running as well as final bills.

The contractor shall have to start the awarded work within the **5 days*** of award of work. Since the work is seasonal/time bound nature and if any contractor fails to complete the work within the stipulated time/period, it will be awarded to the second lowest and performance security will be forfeited.

If the contractor abandons the work in between and project is convinced that the contractor will not able to complete the work, project staff will take over and complete the work at the risk and cost of contractor. Violation of the condition will debar the contractor for claim of payment for work.

Please note that no payment will be allowed to you till the work executed in full quantity and good quality and measured by the authorized representative of the APO Unit Paonta

You are, further requested to please contact the APO/FEO of Paonta Unit and start the work at once as per guidance.

Encls: As above.

District Project Officer(IDP),
Sirmaur, at Nahan.

Endst. No.DPO/NHN// _____ Dated, Nahan the/ _____

Copy is forwarded to APO Paonta for favour of information and n/action. He is directed to provide site for subject cited work to the contractor and get the work started/completed within the stipulated period under intimation to this office. Please note that detail of labour engaged by the contractor duly verified by the work incharge, date of start/completion of work, date of measurement of work, Bills of B/Wire, U. Stapple, Fence Post etc. should be mentioned/enclosed with the bill of work.

District Project Officer(IDP),
Sirmaur, at Nahan.